

## NMW-22 Bronze Ball Valve With Integral Strainer

### Description

- Full Bore, Two Piece Design
- Renewable Body Ring, S.S. Stem.
- Quarter Turn, Lever Operated for convenience.
- Screwed Female Ends BSP (IS: 554) Parallel Threads.
- Strainer is provided with S.S. (AISI-304) Screen, which is guided both in body and in cover.

### Test Pressure

Body : 348 Psig Hyd.


Seat : 232 Psig Hyd.

### Certification

Work Test Certificate can be issued, if required.

**Application : Water, Air**

**HSN : 84818020**

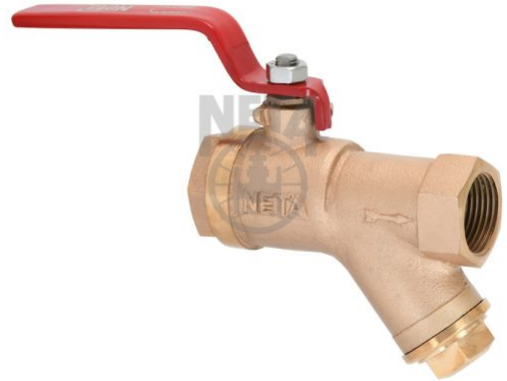

### Materials

PNo.	Part	Nos.	Material	Standard
1	Lever Nut	1	M.S. / S.S.	IS:1367 / AISI 304
2	Washer	1	M.S.	IS:226
3	Gland	1	Brass / Gun Metal	IS:6912 Gr. FLB / IS:318 Gr. LTB2
4	Gland Packing	-	Teflon	PTFE BS EN 12086-1
5	Connector	1	Bronze	IS:318 Gr. LTB2
6	Body Ring	2	Teflon	PTFE BS EN 12086-1
7	Ball	1	S.S. 18/8 % Cr./ Ni. / S.S. 13% Cr.	AISI 304 / CF8/ AISI 410
8	Body	1	Bronze	IS:318 Gr. LTB2
9	Cover	1	Bronze	IS:318 Gr. LTB2
10	Screen	1	S.S. 18/8 % Cr./ Ni.	AISI 304
11	Lever Sleeve	1	PVC	-
12	Lever	1	M.S.	IS:226
13	Stem	1	S.S. 13% Cr.	AISI 410

### Dimensions

Nominal Size (Inches)	Nominal Size (mm)	A±1.5	B BSP	C	G
1/2	15	92	1/2"	54	100
3/4	20	103	3/4"	56	100
1	25	120	1"	62	118

